(19) World Intellectual Property Organization

International Bureau

9 September 2005 (09.09.2005)





(10) International Publication Number WO 2005/083466 A1

(51) International Patent Classification7:

G01V 1/38

(21) International Application Number:

PCT/US2004/002477

(22) International Filing Date: 29 January 2004 (29.01.2004)

(25) Filing Language:

English

(26) Publication Language:

English


- (71) Applicant (for all designated States except US): WEST-ERNGECO, L.L.C. [US/US]; 10001 Richmond Avenue, Houston, TX 77042 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HUSOM, Vidar, A. [NO/NO]; Oppsjolia 32a, Asker 1385 (NO). WELKER, Kenneth, E. [US/NO]; Korpasen 1b, Asker 1386 (NO).
- (74) Agent: PYLE, Jeffrey, A.; Williams, Morgan & Amerson, P.C., 10333 Richmond Ave., Suite 1100, Houston, TX 77042 (US).

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SEISMIC CABLE POSITIONING USING COUPLED INERTIAL SYSTEM UNITS

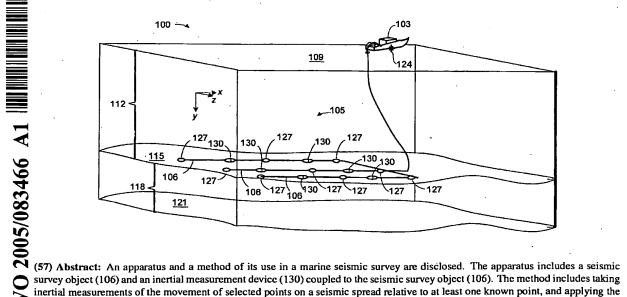

survey object (106) and an inertial measurement device (130) coupled to the seismic survey object (106). The method includes taking inertial measurements of the movement of selected points on a seismic spread relative to at least one known point, and applying the inertial measurements to the known point to determine the positions of the selected points.